
Processing recommendations

For processing Holonite products on the workside

Shortening, sawing, drilling and rounding off edges

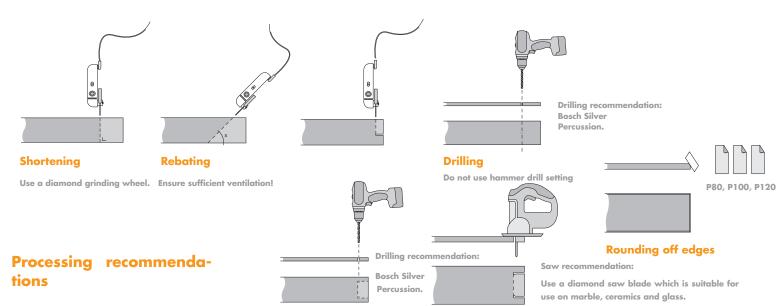

Follow the instructions above if you intend to process any Holonite products yourself. Holonite performs various processing operations on products as standard and according to customer specifications, e.g. cutting recesses and drilling holes. Get in contact for a complete overview of the available options.

Processing recommenda-

The correct use, treatment and processing of Holonite products will result in strong adhesion to the surface. The general processing instructions apply to all products and must always be observed together with the processing instructions specific to the product. A special Holonite adhesive/sealant has been developed to facilitate optimal use of Holonite products. Holonite B&S (Bond & Seal). Used according to the processing instructions and in combination with Holonite primer and degreaser, this adhesive guarantees optimal adhesion and sealing of expansion joints. Visit www.holonite.co.uk for general and product-specific processing instructions.



Modular rebating

Warning

Quartz dust may be released into the air when sawing, drilling or sanding Holonite products. When carrying out work of this kind, it is mandatory to wear suitable protective equipment such as safety goggles, a face mask and ear defenders (if necessary). Ensure that the space has sufficient ventilation when processing Holonite products.

